




TP-150/260 with HG-ERGO-DUO



## **TELEPLAN TP Handscreeding System**

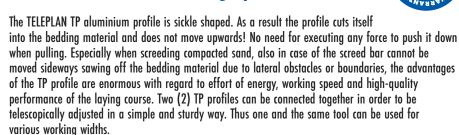

Two fixed clamping units to connect both profiles, clamping units can not get lost.

With height adjustable height stop on both sides, range of adjustment

- 0 127 mm (0 5 inch). Can be taken off quickly if required.
- Intergrated fitting for additional pulling handles TP-HG included in the side parts and HG-ERGO-DUO.
- One level indicator incorporated inside the TP profile.
- The light-weight aluminium hollow profile is extremely sturdy (low weight: only 1.3 kg / 3 lbs per
- Long Lifespan.



Set of Roller Units TP/FP-RS

Туре	Working Width mm (in)	Dead Weight kg (lbs)	Height Adjustable Range mm (in)	Order-Number
TP-60/100	600 - 1,000 (23.62 - 39.37)	3.5 (7.72)	0 - 127 (0.00 - 5.00)	51010006
TP-100/165	1,000 - 1,650 (39.37 - 64.96)	4.6 (10)	0 - 127 (0.00 - 5.00)	51010001
TP-150/260	1,500 - 2,600 (59.06 - 102.36)	6 (13)	0 - 127 (0.00 - 5.00)	51010002
TP-200/350	2,000 - 3,500 (78.74 - 137.80)	7.3 (16)	0 - 127 (0.00 - 5.00)	51010003

## **Accessories:**

HG-ERGO-SOLO: Handle for TELEPLAN and FIXPLAN, which has been further developed according to ergonomic aspects. 1 piece incl. handle holder, enables fatigue-free working in a standing body position.

HG-ERGO-DUO: Handles for TELEPLAN and FIXPLAN, which have been further developed according to ergonomic aspects. Set consisting of 2 pieces, allow fatigue-free working in standing body position, can be attached to the side parts at any time via a plug-in fastener.

TP/FP-RS: Set of Roller Units for TELEPLAN/FIXPLAN (can be added later).

Туре	Dead Weight kg (lbs)	Order-Number
HG-ERGO-SOLO	2.6 (5.73)	41010074
HG-ERGO-DUO	4.3 (9.48)	41010072
TP/FP-RS	1.2 (2.65)	41010080